



**THE**  
**SEARIAL CLEANERS**  
STOP WONDERING START CLEANING

QUICK START USER GUIDE  
**COLLEC'THOR**


# BEST PRACTICES

## Introduction

Please read this user guide carefully to learn key best practices. **Beware that this guide is not a substitute of the technical notice.**




## Before every use

- Make sure to check sacrificial anodes. They must be replaced imperatively once consumed.
- Make sure the winch cable is well fitted into every pulley.
- Make sure the winch cable is not frayed
- Make sure the rear door closes correctly
- Make sure the beams (x2) are free of any obstacles (e.g.: marine life or trash)

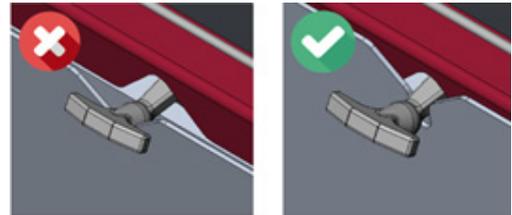



## Taking the trash out

1. When taking the trash out, make sure to pull out both tabs from the Collec'Thor, referring to the drawing.
2. Make sure to gently wait for the tank to empty of water :
  - a - turn off the pump : noise change will indicate when to turn it off
  - b - proceed to using the winch to lift the Collec'Thor
3. **Warning: Do not let the pump run for too long when the tank is empty of water**

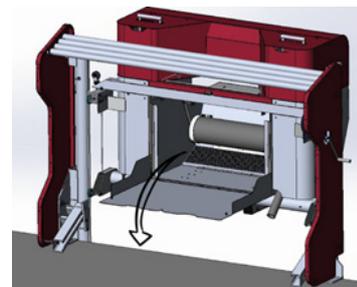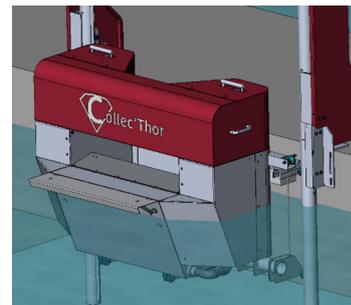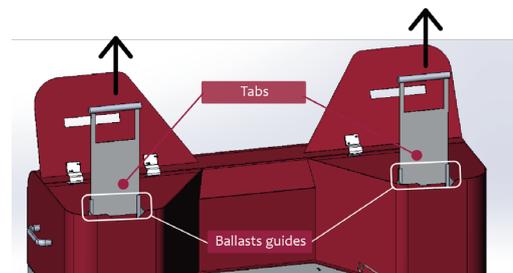

# Maintenance recommendations

Thoroughly clean the Collec'Thor with a pressure washer every **2 to 3 weeks**. Inside surfaces as well as outside surfaces. Beware to include the external surface of the pump as shown on the picture below. Make sure the bolts are properly tightened on both sides of the lifting structure. Check the pulleys.

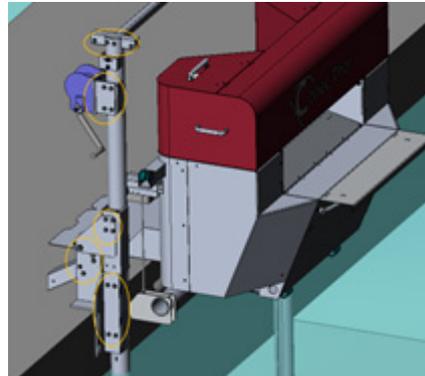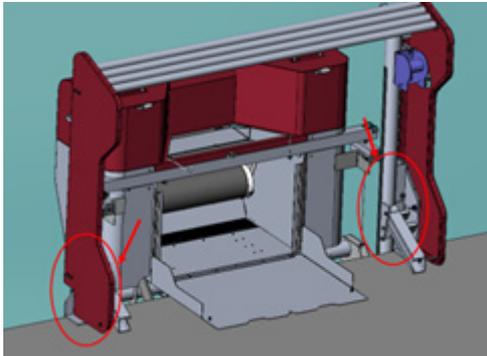


## Pump maintenance

### Every 2 to 3 weeks :

Unscrew the PVC fitting under the pump, referring to the drawing below. Lubricate the pump with WD40 type of lubricant or marine specialised lubricant. Clean the outside and the inside of the pump using clear water.

### Once a year :

Perform an oil change. Refer to the pump instructions manual delivered with the Collec'Thor.


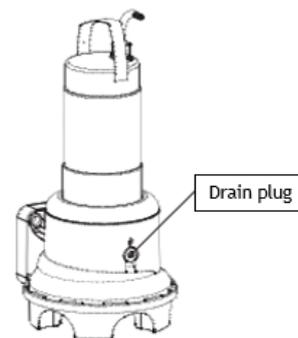


## In the event of prolonged stop - over a week:

Strictly maintain the Collec'Thor **out of the water**.

Clean the pump referring to the procedure below

Lubricate the pump with WD40 type of lubricant or marine specialised lubricant.

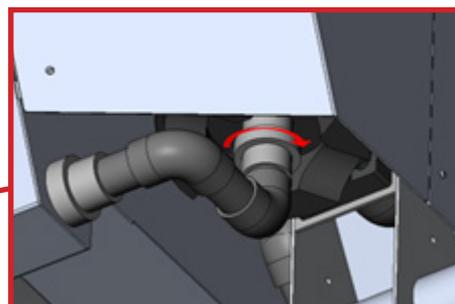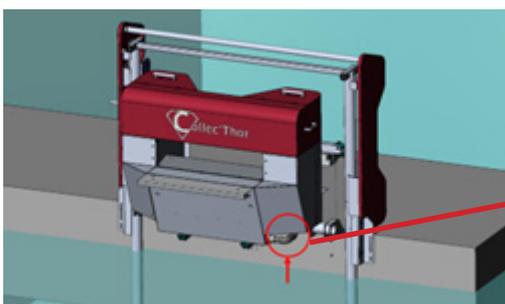

# THE SEARIAL CLEANERS

STOP WONDERING START CLEANING

## AFTER SALES CONTACT

Email : [aftersales@searial-cleaners.com](mailto:aftersales@searial-cleaners.com)

Adress :

ROTAX MARINE

ZI LE MARAIS - Rue de l'Industrie

01460 PORT



[www.searial-cleaners.com](http://www.searial-cleaners.com)